

AM POST PROCESSING **PPT**




spa
le
ck

© SPALECK ENGINEERING

Automatic post processing of additive manufactured parts

Maximum flexibility for the post processing of different AM parts. Two independently operating tubs allow simultaneous smoothing and polishing. Intelligent control and automatic media return minimize operator intervention. Independence of location of the plant thanks to an integrated waste water treatment.



MADE IN GERMANY

 postprocessing.spaleck.biz

AM POST PROCESSING PPT



Technical specifications:

- Soundproofed standalone unit with integrated waste water treatment system
- High automation degree thanks to intelligent system control*
- Integrated separation unit with automatic media return*
- Continuous adjustment of the processing intensity
- Two individually driven tubs
- Special rubber lining for ball burnishing applications

Optional specifications:

- Chamber division for gentle individual treatment
- Use of different motors for simultaneous smoothing and polishing

*only PPT80

Technical data:


Description	PPT80	PPT80S
Working tub volume	l	2 x 40
Operating voltage	V Hz	400 50
Drive power	kW	1,1 2,2
Motor speed	Upm	1500 3000
Empty weight basic machine	kg	1400
Space requirement basic machine	m ²	3,4
		2,1

Dimensions working tub in mm


Description	PPT80	PPT80S
Length working tub	A	790
Width working tub	B	210
Height working tub	C	255

Dimensions basic machine in mm

Description	PPT80	PPT80S
Lenght machine	A	2410
Width machine	B	1420
Height machine	C	2250
Top edge working tub	D	1000

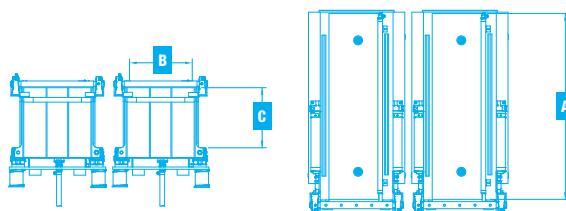

Automatic media return PPT80

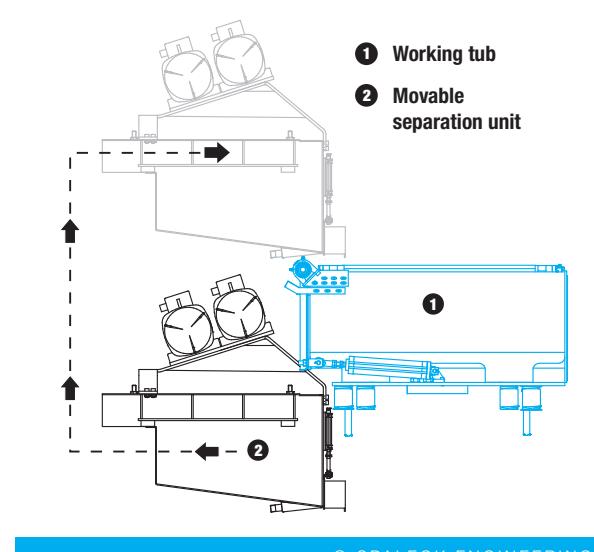

© SPA LECK ENGINEERING